

01.03 Order picking trolley KT4

Robust and extremely durable

- > Load capacity up to 600 kg
- > Adapted for European standard boxes
- > System design with individual structure



KT4 Basic model with accessories
Dimensions (mm): W 1306 x D 806 x H 1650



Basic model

Basic model


Design: Chassis made of square tubing with wooden support. Side panels made of square tubing frame with wire grate, inserted into chassis and screwed into place. Wooden shelves can be screwed into place at different heights (100 mm intervals).

Castors: 2 Wanzl fixed castors and 2 Wanzl swivel castors Ø 160 mm, optionally with brake or central brake. Rubber tread.


Finish: High-gloss, galvanised, chrome-plated.

Technical specifications:

Total load capacity	600 kg
Chassis load capacity	200 kg
Load capacity per shelf	150 kg

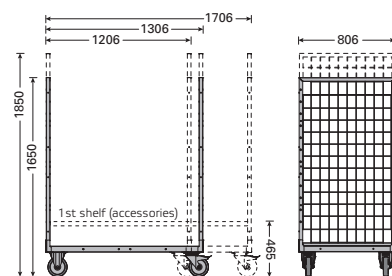

KT4 with depth of 806 mm, dimensions in mm

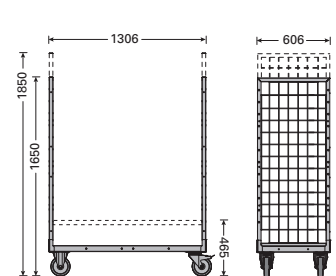


KT4 with depth of 606 mm, dimensions in mm

01.03 Order picking trolley KT4

Transport with forklift




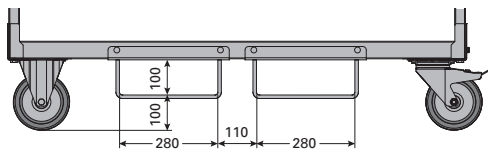









■ **The optional forklift loops** enable labour-saving transportation in combination with most forklift models.
 Note: Forklift insertion on the short side is only possible in conjunction with castor set Ø 125 mm and additional insertion aid for forklift trucks (available on request).



Forklift loops, dimensions in mm utility mod. pend.



Order numbers

Dimensions (mm): Width x Depth		1206 x 806	1306 x 606	1306 x 806	1706 x 806	
Basic model order no.	Height 1650	06.00 500.50	06.00 506.50	06.00 502.50	06.00 504.50	
	Height 1850	06.00 501.50	06.00 507.50	06.00 503.50	06.00 505.50	
Structure elements						
	Rear panel grate Riveted on, mesh size 75 x 100 mm	For KT4 with height of 1650 For KT4 with height of 1850	77.54 286.50 77.54 399.50	77.54 060.50 74.54 173.50	77.54 060.50 77.53 173.50	77.53 721.50 77.53 947.50
Shelves						
	Shelf With non-slip wooden support, screw-in Useful area W x D in mm (without rear panel)		77.52 252.50 1139 x 800	77.52 591.50 1239 x 600	77.52 365.50 1239 x 800	77.52 478.50 1639 x 800
	Anti-slip guard For shelf and chassis, 10 mm projection		77.78 581.50	77.78 694.50	77.78 694.50	77.78 807.50
Accessories						
	Pushing handle made of plastic-coated steel tubing in RAL 5002 ultramarine blue or RAL 3000 flame red		77.54 512.76	77.54 625.76	77.54 512.76	77.54 512.76
	Writing board Coated metal board with clamping strip, deep black structure		77.54 738.95	77.54 738.95	77.54 738.95	77.54 738.95
	Clipboard Attachable, adjustable angle, with clamping strip		00.50 007.95	00.50 007.95	00.50 007.95	00.50 007.95
	Forklift loops With underbody protection		77.54 851.50	77.64 004.50	77.54 851.50	77.54 851.50
	Ladder Hinged, 3 steps with non-slip chequered rubber surface		77.54 964.50	77.55 077.50	77.54 964.50	77.54 964.50
	Wire tray for small items, plastic-coated in RAL 9005 jet black, W 235 x D 170 x H 135 mm, mesh size 5 x 5 mm		00.14.378.76	00.14.378.76	00.14.378.76	00.14.378.76
	Coupling/drawbar system		available on request			
Castor sets						
	Castor set Ø 160 mm (bonded on) 2 swivel castors, incl. 1 with brake + 2 fixed castors		60.07 690.00	60.07 690.00	60.07 690.00	60.07 690.00
	Castor set Ø 160 mm (elastic) 2 swivel castors, with central brake + 2 fixed castors		60.08 142.00	60.07 577.00	60.08 142.00	60.08 142.00
	Castor set Ø 125 mm (elastic) for forklift insertion on short side 2 swivel castors + 2 fixed castors, with guidance device for forklift		available on request			